

JVC

SERVICE MANUAL


AV SELECTOR

JX-S777

Design and specifications are subject to change without notice.


Schematic Diagrams

■ DV SECTION

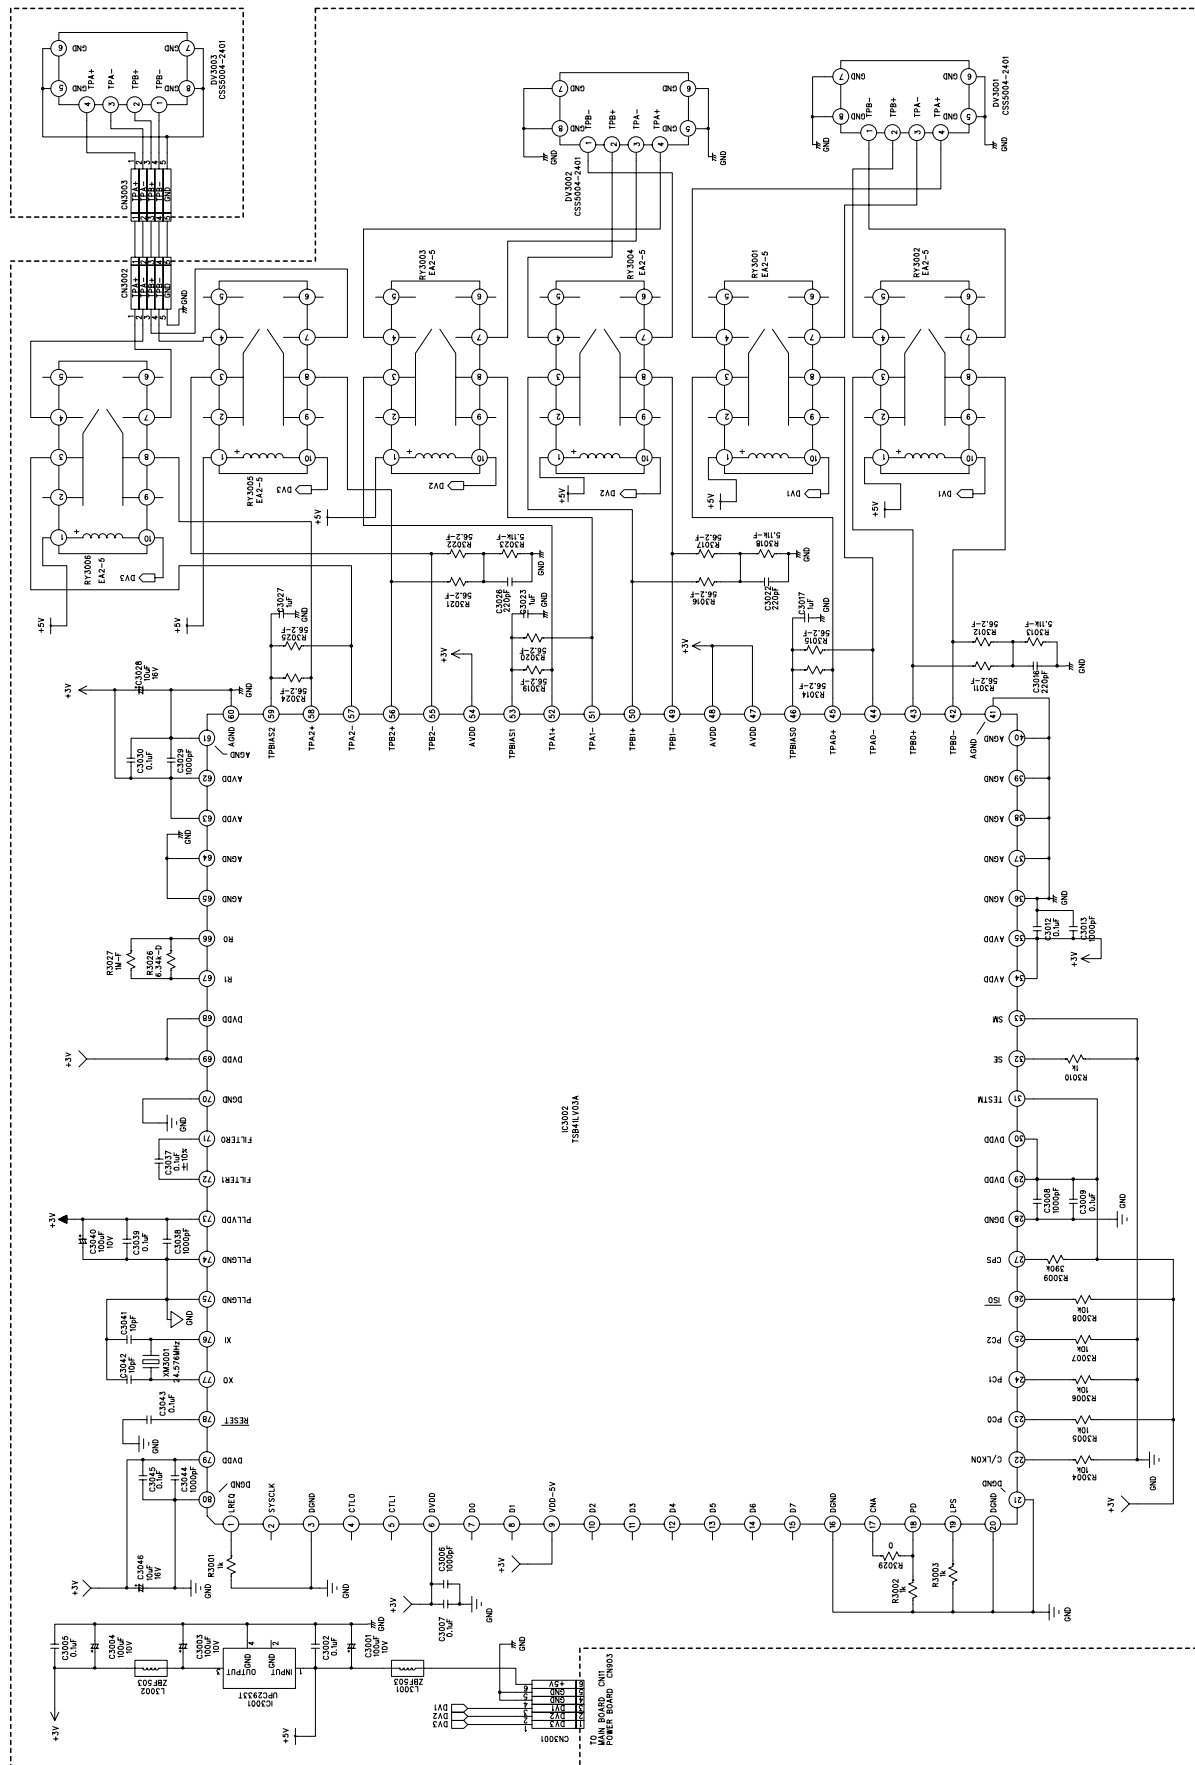


Circuit Boards

■ DV BOARD (J46709-003) PARTS SIDE

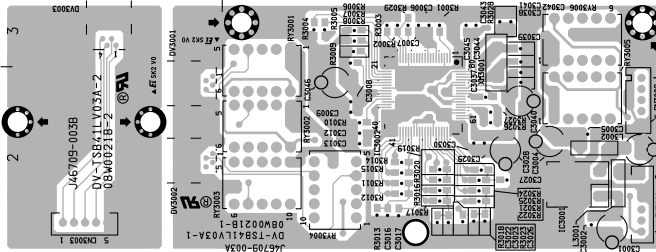

■ DV BOARD (J46709-003) SOLDER SIDE

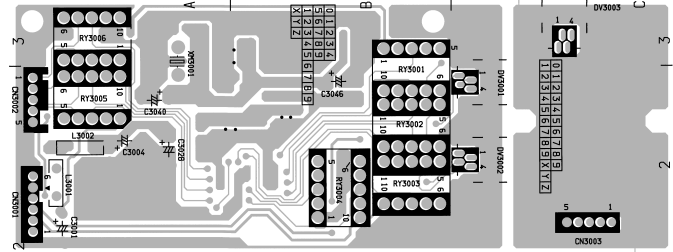


Electric Parts List

■ DV P.W. Board Ass'y

△ Ref. No.	PartsNo.	PartsName,Description	
-	J46776-003	DV Board Assembly The part will not be supplied as an assembly.	
IC3001	UPC2933T	IC	NEC
IC3002	TSB41LV03A	IC	TI
R3001	NRSA02J-102NY	M.G.Resistor	1kΩ, 1/10W
R3002	NRSA02J-102NY	M.G.Resistor	1kΩ, 1/10W
R3003	NRSA02J-102NY	M.G.Resistor	1kΩ, 1/10W
R3004	NRSA02J-103NY	M.G.Resistor	10kΩ, 1/10W
R3005	NRSA02J-103NY	M.G.Resistor	10kΩ, 1/10W
R3006	NRSA02J-103NY	M.G.Resistor	10kΩ, 1/10W
R3007	NRSA02J-103NY	M.G.Resistor	10kΩ, 1/10W
R3008	NRSA02J-103NY	M.G.Resistor	10kΩ, 1/10W
R3009	NRSA02J-394NY	M.G.Resistor	390kΩ, 1/10W
R3010	NRSA02J-102NY	M.G.Resistor	1kΩ, 1/10W
R3011	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3012	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3013	J46567-5111	M.G.Resistor	5.11kΩ, 1/10W
R3014	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3015	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3016	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3017	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3018	J46567-5111	M.G.Resistor	5.11kΩ, 1/10W
R3019	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3020	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3021	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3022	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3023	J46567-5111	M.G.Resistor	5.11kΩ, 1/10W
R3024	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3025	J46567-56R2	M.G.Resistor	56.2Ω, 1/10W
R3026	J46567-6341	M.G.Resistor	6.34kΩ, 1/10W
R3027	J46567-1004	M.G.Resistor	1MΩ, 1/10W
C3001	QETB1AM-107	E.Capacitor	100uF, 10V
C3002	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3003	QETB1AM-107	E.Capacitor	100uF, 10V
C3004	QETB1AM-107	E.Capacitor	100uF, 10V
C3005	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3006	NCB21HK-102AY	Cer.Capacitor	0.001uF, 50V
C3007	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3008	NCB21HK-102AY	Cer.Capacitor	0.001uF, 50V
C3009	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3010	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3011	NCB21HK-102AY	Cer.Capacitor	0.001uF, 50V
C3012	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3013	NCB21HK-102AY	Cer.Capacitor	0.001uF, 50V
C3014	NCT21CH-221AY	Cer.Capacitor	220pF, 50V
C3015	NCB21HK-105AY	Cer.Capacitor	1uF, 50V
C3016	NCT21CH-221AY	Cer.Capacitor	220pF, 50V
C3017	NCB21HK-105AY	Cer.Capacitor	1uF, 50V
C3018	NCT21CH-221AY	Cer.Capacitor	220pF, 50V
C3019	NCB21HK-105AY	Cer.Capacitor	1uF, 50V
C3020	QETB1HM-106	E.Capacitor	10uF, 16V
C3021	NCB21HK-102AY	Cer.Capacitor	0.001uF, 50V
C3022	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3023	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3024	NCB21HK-102AY	Cer.Capacitor	0.001uF, 50V
C3025	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3026	NCT21CH-100AY	Cer.Capacitor	10pF, 50V
C3027	NCT21CH-100AY	Cer.Capacitor	10pF, 50V
C3028	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3029	NCB21HK-102AY	Cer.Capacitor	0.001uF, 50V
C3030	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3031	QETB1AM-107	E.Capacitor	100uF, 10V
C3032	NCT21CH-100AY	Cer.Capacitor	10pF, 50V
C3033	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3034	NCB21HK-102AY	Cer.Capacitor	0.001uF, 50V
C3035	NCB21HK-104	Cer.Capacitor	0.1uF, 50V
C3036	QETB1HM-106	E.Capacitor	10uF, 16V
L3001	J46781-001	Beas	
L3002	J46781-001	Beas	
XM3001	JXC2457-600CG	Cristal	S.I
RY3001	J46775-001	Relay	NEC
RY3002	J46775-001	Relay	NEC
RY3003	J46775-001	Relay	NEC
RY3004	J46775-001	Relay	NEC
RY3005	J46775-001	Relay	NEC
RY3006	J46775-001	Relay	NEC
CN3001	J45081-001	P.W.B.Connector	
CN3003	J45085-001	P.W.B.Connector	
DV3001	J46712-001	DV-JACK	
DV3002	J46712-001	DV-JACK	
DV3003	J46712-001	DV-JACK	
JWS0105-0116	J46827-001	Conn.WireAssy	ForCN3002
		ShieldSheet	

Block View Inside IC

■ IC3002
TSB41LV03A [IT]

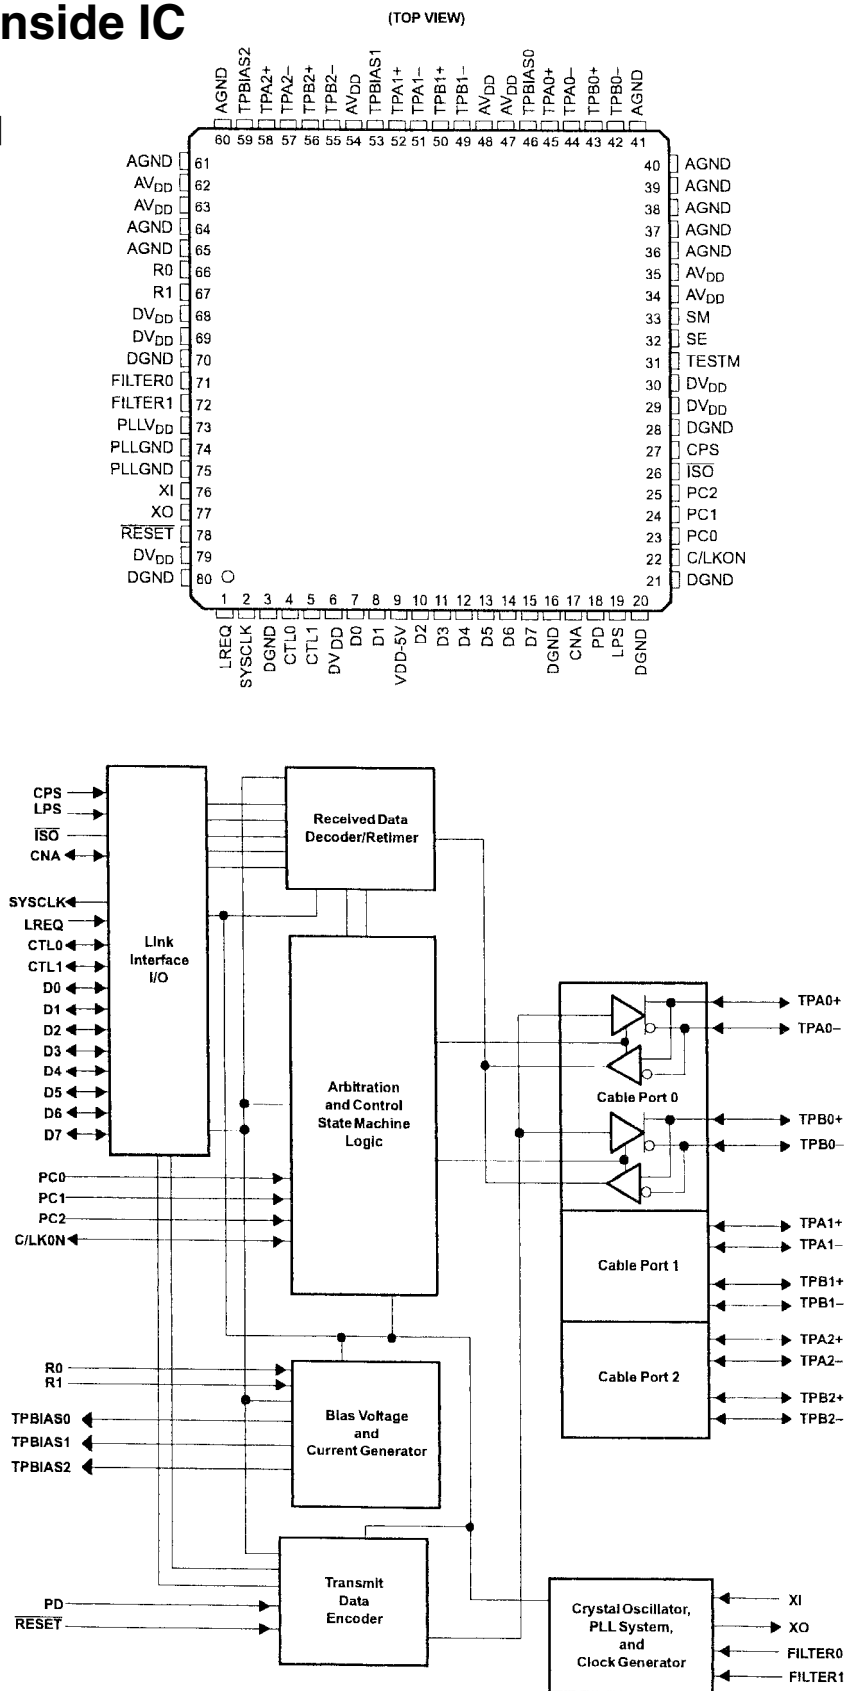

JVC

VICTOR COMPANY OF JAPAN, LIMITED

COMMUNICATION NETWORK BUSINESS UNIT, 1644, SHIMOTSURUMA, YAMATO-SHI, KANAGAWA-KEN, 242-8514, JAPAN